

SE 604 Memosens Conductivity Sensors

Robust 2-electrode sensor, for precise and reliable measurement of low and very low conductivities, particularly in ultrapure water, digital, with Memosens technology.

Robust, coaxially arranged electrodes made of stainless steel. Large measuring range from ultrapure water to 500 $\mu\text{S}/\text{cm}$. Integrated temperature detector for temperature compensation. Easy to clean thanks to replaceable outer electrode.

Applications

Boiler feed water, feed water, boiler water, cooling water, water vapor cycle, pure water, condenser monitoring

Facts

- Perfect galvanic isolation thanks to Memosens technology
- Digital data transfer
- Integrated sensor diagnostics
- Large measuring range from ultrapure water to 500 $\mu\text{S}/\text{cm}$
- Coaxially arranged electrodes
- Independent of installation conditions
- Integrated temperature detector
- High level of process safety due to durable materials and robust design
- Easy to clean thanks to detachable outer electrode
- Particularly suitable for monitoring ultrapure water in power plants

Specifications

Cell constant:	0.029/cm
Measuring range:	0.001 ... 500 $\mu\text{S}/\text{cm}$
Accuracy:	2 % meas. value
Material:	Sensor body and electrodes: 1.4571 stainless steel Insulator: PVDF Gaskets: FKM (Viton)
Temperature detector:	NTC 30 k Ω
Temperature:	Medium: -20 ... +120 °C Environment: -25 ... +80 °C
Pressure:	Max. 25 bar(-20 ... +70 °C) Max. 10 bar (120 °C)
Process adaptation:	G 1" thread
Sensor connector:	Memosens
ATEX marking:	II 1 G Ex ia IIC T3/T4/T6
FM marking:	IS for Class I, Division 1, Groups A, B, C, D; Class I, Zone 0, AEx/Ex ia IIC T6 ... T4 NIFW for Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, IIC T6 ... T4

SE 604 Memosens Conductivity Sensors

Product Range


Sensor		Order No.
SE 604 conductivity sensor	G 1"	SE 604-MS
SE 604 X conductivity sensor	Ex G 1"	SE 604X-MS

Accessories		Order No.
Memosens cable	3 m	CA/MS-003NAA
	5 m	CA/MS-005NAA
	10 m	CA/MS-010NAA
	20 m ^{*)}	CA/MS-020NAA
Memosens cable, Ex	3 m	CA/MS-003XAA
	5 m	CA/MS-005XAA
	10 m	CA/MS-010XAA
	20 m ^{*)}	CA/MS-020XAA
6-hole flange		ZU 0278
Conductivity standard	KCl 15 µS/cm ± 1 % 300 ml	ZU 0350
	KCl 147 µS/cm ± 1 % 500 ml	ZU 0702


MemoSuite		Order No.
Management software for Memosens sensors	Basic version (calibration)	SW-MS1400-B
	Advanced version (calibration, diagnostics, documentation)	SW-MS1400-A

^{*)} Greater lengths on request

Pressure/Temperature Diagram

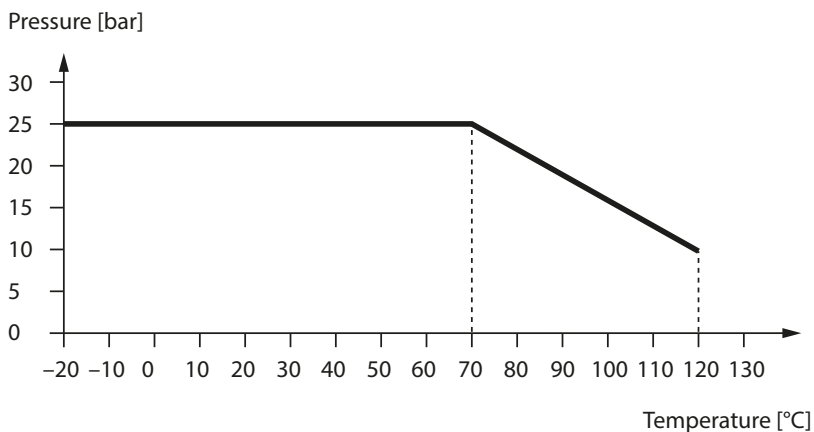

Dimension Drawing

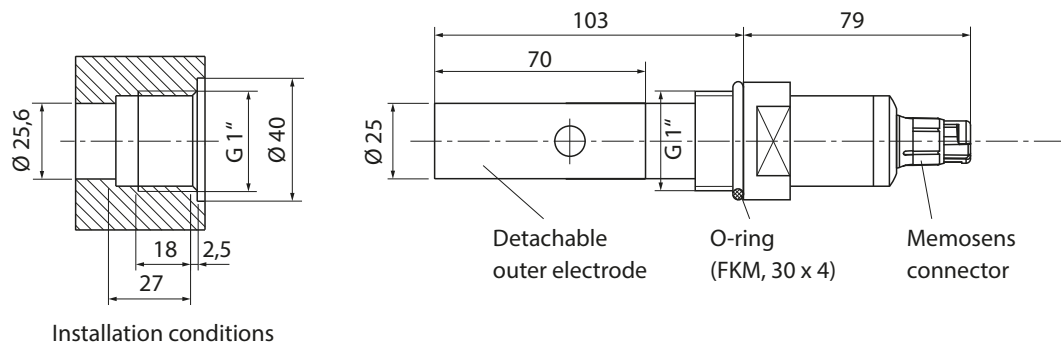

SE 604 Memosens Conductivity Sensors



Accessories / Specifications

Flange (6-hole)
ZU 0278



Material: Stainless steel, 1.4571
 Accessories: 6 bolts, washers, nuts, M 12, 1.4571 stainless steel
 Pressure: Max. 10 bar
 Temperature: Max. 120 °C
 Sensor locations: 1 x G 1"
 Sensors: SE 604

Dimension drawing SE 604 Memosens with ZU 0278 flange

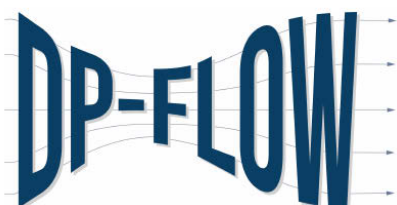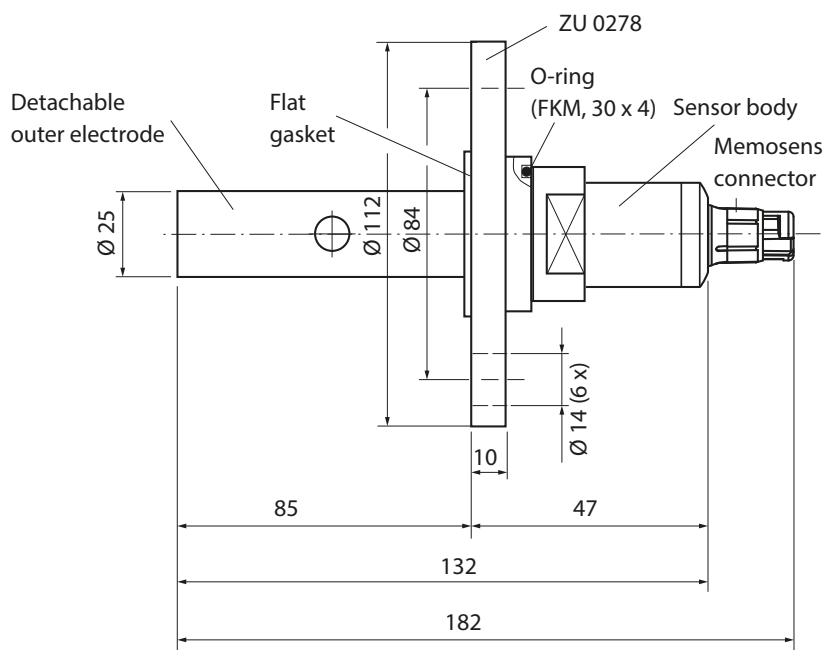

All dimensions in mm